


CONTROL RING 272127-3001 SHIPPED WITH BUT NOT ATTACHED TO INSULATOR

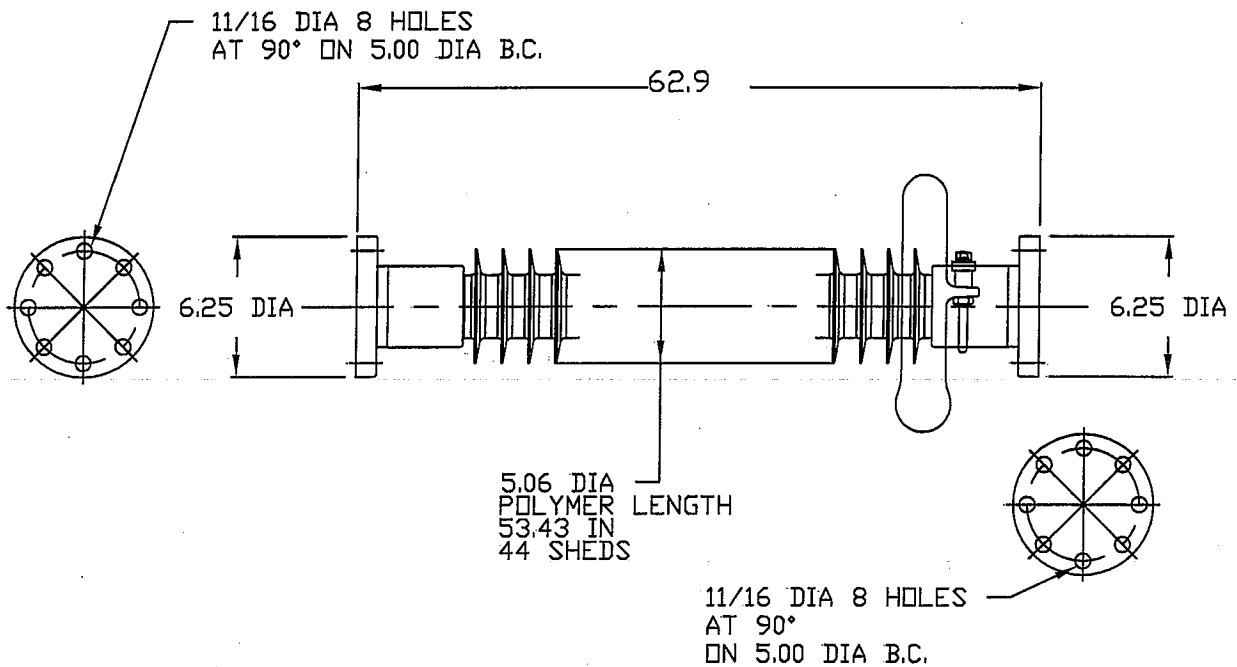

FLOOD WASHABLE
SILICONE RUBBER HOUSING

STRIKE DISTANCE	51 IN
LEAKAGE DISTANCE	139 IN
AVERAGE BREAKING LOAD	0 LB
MAXIMUM WORKING LOAD	0 LB
DRY 60 HZ FLASHOVER	510 kV
WET 60 HZ FLASHOVER	445 kV
WET 60 HZ WITHSTAND	375 kV
IMPULSE CRITICAL POSITIVE	785 kV
IMPULSE WITHSTAND POSITIVE	745 kV
IMPULSE CRITICAL NEGATIVE	895 kV
IMPULSE WITHSTAND NEGATIVE	850 kV
WEIGHT	30 LB

ELECTRICAL CHARACTERISTICS IN
ACCORDANCE WITH ANSI C29.1-1988

HUBBELL BRASS
TOLERANCE CHART



HUBBELL POWER SYSTEMS

CONFIDENTIAL: THIS DRAWING AND ITS CONTENTS ARE CONFIDENTIAL AND THE EXCLUSIVE PROPERTY OF HUBBELL POWER SYSTEMS. NO PUBLICATION, DISTRIBUTION OR COPIES MAY BE MADE WITHOUT THE WRITTEN CONSENT OF HUBBELL POWER SYSTEMS. HUBBELL POWER SYSTEMS UNPUBLISHED ALL RIGHTS RESERVED UNDER THE COPYRIGHT LAWS.

TITLE
QUADRI*SIL LINE
POST SERIES 250

Program Revision
2008.01.30.02.10.24
REV DATE 02/05/08

SIZE	DWG NO.	CAT / PART / ASSY NO.	REV
S	ER_250-QR	P250053S515A	0
DO NOT SCALE THIS DRAWING		DRN BY PRO1194 DATE 08/27/07	SHEET 1 OF 1