



DWG NUMBER: HT-10933		REV: A	
REV	REVISIONS	BY	DATE
A	RELEASED	LS	10/09/02
			I.Z.

BILL OF MATERIALS
TABLE 1

ITEM NO	DESCRIPTION	PART NO	NOTES	QTY
1	MAT FT CONNECTOR	ST18-0M-00A-P	1	4
2	FERRULE RELIEF BOOT	BT18-P	4	2
3	STAINLESS STEEL BODY	BT18-P	4	2
4	CRIMP RING	CR18-P	5	4
5	CABLE	CR22M-0P	2, 2b, 2b	X
6	MARKER	LM18-0M-0P	3	2
7	PLASTIC BAG	BA18-P	6, 7	1
8	BAG LABEL	LAB18-0M-0P	8	1



JUMPER PACKAGE MATERIALS

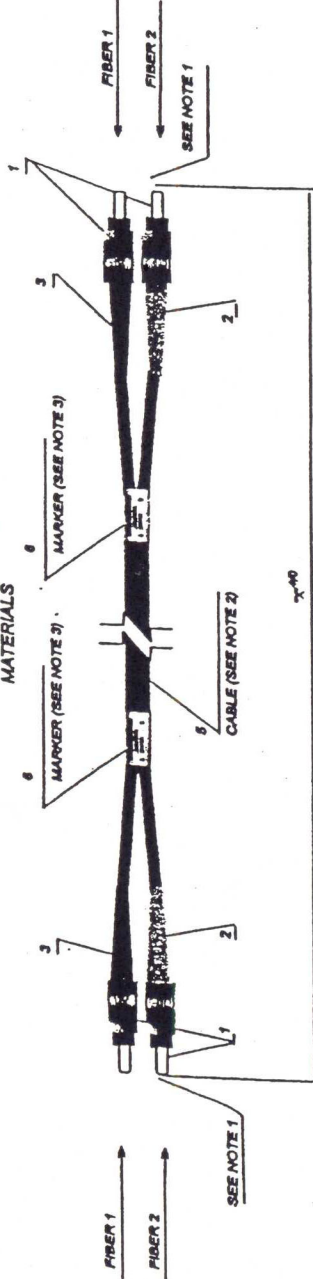

OPTICAL PERFORMANCE REQUIREMENTS
TABLE 2

OPTICAL PARAMETER	WAVELENGTH, nm	VALUE
INSERTION LOSS, dB max/typical	850	1310
RETURN LOSS, dB min/typical		0.75/0.40
		25.0/30.0
		25.0/30.0

COLOR CODE
TABLE 3

ITEM NO	DESCRIPTION	COLOR	PRINT
5	CABLE	ORANGE	BLACK
6	MARKER	WHITE	BLACK

- NOTES:**
- PROTECTIVE CAP MUST BE INSTALLED ONTO EACH CONNECTOR. (NOT SHOWN FOR CLARITY).
 - CABLE (SEE TABLE 3): 50/125 DUPLEX ROUND, 3mm ODNV, STANDARD COLOR IS ORANGE (DIFFERENT COLORS AVAILABLE PER CUSTOMER REQUEST)
 - 2a. "X" DIMENSION IS APPLICABLE TO JUMPER LENGTH FROM CONNECTOR FERRULE TIP-TO-CONNECTOR FERRULE TIP
 - 2b. FOR LENGTH < 3M "X" TOL = +0.10M
 - FOR LENGTH > 3M "X" TOL = +0.15M
 - MARKER (SEE TABLE 3) PRINTED WITH ASSEMBLY LENGTH, PART NUMBER, SERIAL NUMBER.
 - BEND RELIEF BOOT (OTHER COLORS AVAILABLE)
 - CRIMP RING NOT SHOWN ON THE DRAWING
 - 9"X10" CLEAR PLASTIC BAG
 - ASSEMBLY TO BE COILED & CABLE LOOSELY TIED WITH TIE WRAP.
 - 3"X4" WHITE LABEL PRINTED

HellemannTyton	
DRAWN BY:	LS
DATE:	9/30/02
APVD:	I.Z.
DATE:	10/09/02
TITLE:	
PART NUMBER:	FAXSTST
DWG NUMBER:	HT-10933
REV:	A